


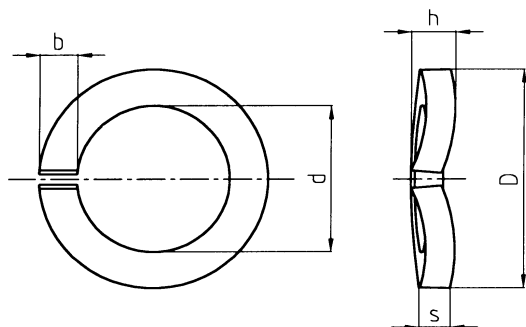

DIMENSIONS AND FEATURES							PROOF CONDITIONS		PACKAGING		
For screws of	d min.-max.	D max.	b min.-max.	s min.-max.	h min.-max.	Kg/1000 pieces	Loading test [N]	Min. residual height	No. of pcs standard packaging	No. of pcs bulk packaging	No. of pcs micro packaging
M 2.5	2.25-2.35	4.55	0.90-1.10	0.50-0.70	0.90-1.10	0.055	1160	0.70		180000	
M 3.0	2.70-2.80	5.60	1.20-1.40	0.60-0.80	1.10-1.30	0.090	1760	0.85		120000	
M 3.5	3.20-3.30	6.10	1.20-1.40	0.60-0.80	1.10-1.30	0.100	2370	0.85		100000	
M 4.0	3.60-3.75	6.95	1.40-1.60	0.70-0.90	1.20-1.40	0.150	3050	0.95		70000	
M 5.0	4.55-4.75	8.55	1.70-1.90	0.90-1.10	1.50-1.70	0.260	5050	1.20		45000	
M 6.0	5.50-5.70	11.00	2.35-2.65	1.20-1.40	2.00-2.20	0.640	7050	1.50		22000	
M 8.0	7.40-7.65	13.95	2.85-3.15	1.50-1.70	2.45-2.75	1.230	12900	2.00		10000	
M 10.0	9.30-9.55	16.95	3.30-3.70	1.70-1.90	2.85-3.15	2.000	20600	2.25		5000	
M 12.0	11.00-11.30	19.70	3.80-4.20	1.95-2.25	3.35-3.65	3.099	30000	2.65		3000	

Dimensions in mm

Technical details:

Hardness: 430 - 530 Hv.
 Tightening couples: see table.
 Chemical analysis of raw material: see table.
 Sorted out material to prevent the presence of foreign parts.

Anticorrosion surface covering:

Dry and clean surface.

Features and specific use:

Washer to be used only for preassembling with metric pitch screws.